

# Product Specification Sheet

## SL60-U12 120-277 W

Line Voltage: 120~277Vac 50/60Hz  
 Safety Voltage: 108~305Vac 50/60Hz  
 Constant Voltage Output  
 High Power Factor, Low ATHD  
 Output Voltage Tolerance:  $\pm 3\%$

RoHS Compliance  
 Open Circuit Protection  
 Short Circuit Protection  
 Max. Output Voltage: 16V  
 Tc(max): 80°C  
 Ta: -20~50°C

Vin (V)	Iin (A)	PF(λ)	Vout (V)	Iout (mA)	Efficiency	Standby power (W)	Ripple Voltage(pk-pk) (mV)
120-277	0.59-0.26	0.95	12	0~5000	85% @277V	<0.5	480


Application and Performance Specification Information Subject to Change Without Notification

### Standards

UL8750  
 FCC Part 15 Class A


### Safety

No PCB's  
 UL  
 Sound Rated: A

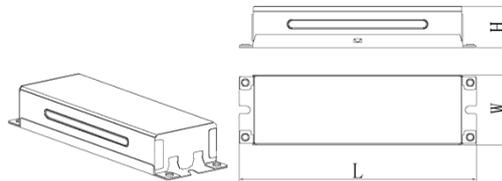

### Physical Parameters

Overall Length (L): 9.6"  $\pm 0.1$ "  
 Width (W): 1.7"  $\pm 0.1$ "  
 Height (H): 1.18"  $\pm 0.1$ "  
 Weight: 620g

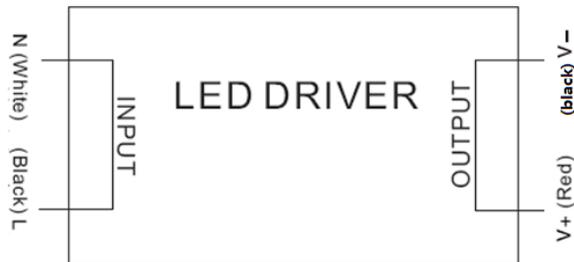

### Caution

Install in accordance with the national electrical code; Disconnect power before serving.

### Warranty:

Arcata electronics Inc warrants that each LED driver will be free from defects in material or workmanship including replacement for 3 years from the date of manufacture when properly installed and under normal condition use.