

APPLICATION and PERFORMANCE SPECIFICATION

ACT1P400PSUNV

- Line Voltage:120-277V 50/60Hz
- Program Start
- Active Power Factor Correction
- Lamp End of Life Protection

Lamp Type			Min. Start	Vin	Iin	Pin	ATHD	PF	CF	Lamp current
Type	No.	Watts	Temp. (F/C)	(V)	(A)	(W)	≤%	≥	≤	(A)
	1	30-50	0/-18	277	0.145-0.24	36-60	10	0.90	1.7	0.38-0.45
PLL 36	1	36	0/-18	277	0.153	38	10	0.90	1.7	0.38-0.45

Note: the above data is tested at 60Hz.

Application and Performance Specification Information Subject to Change without Notification.

Performance

Meets ANSI Standard C82.11-2002
 Meets ANSI Standard C62.41-2002
 Meets FCC 18 Non-CONSUMER Limits

Application

Maximum Ambient Temperature: 131°F,55°C
 Remote Mounting: 18 ft. max. Lead length, 18AWG
 Sound Rated: A
 Maximum case temperature Tc: 167°F,75°C

Lead Length

White, Black 18"(±1")
 Red/ Blue 32"(±1")


Safety

No PCB's, Type HL
 UL listed (Class P, Type 1 Outdoor)
 OCV : 300V
 No-load Power : 0.2W

Physical Parameters

Length 9.75 " /248mm
 Width 1.5" /38mm
 Height 1.2" /31mm
 Mounting 8.9" /226mm
 Weight 1.3 lbs

APPLICATION and PERFORMANCE SPECIFICATION

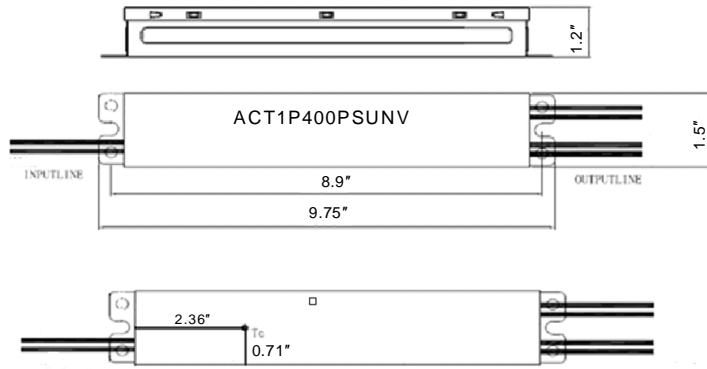

30-50W

