



# APPLICATION and PERFORMANCE SPECIFICATION

## ACT1P800PSUNV

· Line Voltage:120-277V 50/60Hz

· Program Start

Active Power Factor Correction

· Lamp End of Life Protection

Lamp Type			Min. Start	Vin	Iin	Pin	ATHD	PF	CF	Lamp current
Type	No.	Watts	Temp. (F/C)	(V)	(A)	(W)	≤%	≥	≤	(A)
	1	35-100	0/-18	277	0.153-0.44	38-110	10	0.90	1.7	0.75-0.85
PLL 35	1	35	0/-18	277	0.153	38	10	0.90	1.7	0.85

Note: the above data is tested at 60Hz. Application and Performance Specification Information Subject to Change without Notification.

### Performance

Meets ANSI Standard C82.11-2005

Meets ANSI Standard C62.41-2002

Meets FCC 18 Non CONSUMER Limits

### Safety

No PCB's, Type HL

UL listed (Class P, Type 1 Outdoor)

OCV 300V

No-load: 5 Watt

### Application

Maximum Ambient Temperature: 131°F,55°C

Remote Mounting: 18 ft. max. Lead length, 18AWG

Sound Rated: A

Maximum case temperature: 167°F,75°C

### Physical Parameters

Length \* Width \* Height 9.75" \* 1.5" \* 1.2"

Mounting 8.9"


Weight 1.22 lbs

White, Black 25"(±1")

Red/ Blue 31"(±1")



# APPLICATION and PERFORMANCE SPECIFICATION

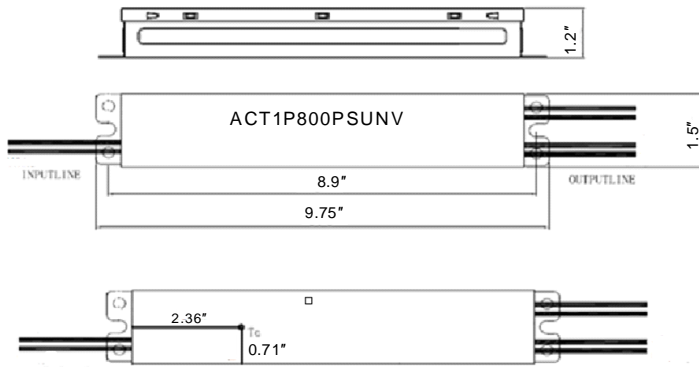

35-100 W

