



# APPLICATION and PERFORMANCE SPECIFICATION

## ACT2S110PSUNV

- Line Voltage:120-277V 50/60Hz
- Program Start
- Series Lamp Operation
- Active Power Factor Correction

Lamp Type			Min. Start Temp. (F/C)	Vin (V)	Iin (A)	Pin (W)	ATHD ≤%	PF ≥	CF ≤	BF	BEF
Type	No.	Watts									
* F96T12/HO	2	110	-20/-29	120	1.54	185	10	0.98	1.7	0.88	0.48
F96T12/HO/ES	2	95	0/-18	120	1.38	165	10	0.98	1.7	0.88	0.53
F72T12/HO	2	85	-20/-29	120	1.17	140	10	0.98	1.7	0.85	0.61
F60T12/HO	2	75	-20/-29	120	0.98	117	10	0.98	1.7	0.82	0.70
F48T12/HO	2	60	-20/-29	120	0.80	96	10	0.98	1.7	0.83	0.86
F96T12/HO	1	110	-20/-29	120	0.80	96	10	0.98	1.7	0.91	0.95
F96T12/HO/ES	1	95	0/-18	120	0.74	88	10	0.98	1.7	0.91	1.03
* F96T12/HO	2	110	-20/-29	277	0.66	180	10	0.97	1.7	0.88	0.49
F96T12/HO/ES	2	95	0/-18	277	0.60	162	10	0.97	1.7	0.88	0.54
F72T12/HO	2	85	-20/-29	277	0.50	137	10	0.97	1.7	0.85	0.62
F60T12/HO	2	75	-20/-29	277	0.42	114	10	0.97	1.7	0.82	0.71
F48T12/HO	2	60	-20/-29	277	0.34	94	10	0.97	1.7	0.83	0.87
F96T12/HO	1	110	-20/-29	277	0.37	95	15	0.90	1.7	0.91	0.96
F96T12/HO/ES	1	95	0/-18	277	0.32	86	15	0.90	1.7	0.91	1.04

Note: The above data is tested at 60Hz. The lamp with "\*" is the main lamp.

The ballast BLE can meet DOE energy conservation standards with main lamp.

Application and Performance Specification Information Subject to Change without Notification.

### Performance

- Meets ANSI Standard C82.11-2005
- Meets ANSI Standard C62.41-2002
- Meets FCC 18 Class A
- Meets DOE energy conservation standards

### Safety

- No PCB's, Type HL, Type CC
- UL&cUL listed (Class P, Type 1 Outdoor)
- OCV 387V

### Application


- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Maximum Ambient Temperature: 55°C
- Sound Rated: A
- Maximum case temperature Tc: 90°C

### Physical Parameters

- Length 9.5"
- Width 2.3"
- Height 1.6"
- Weight 2.4 lbs


### Lead Length

- White, Black 25"(±1")
- Red, Blue 46"(±1")
- Yellow 79"(±1")

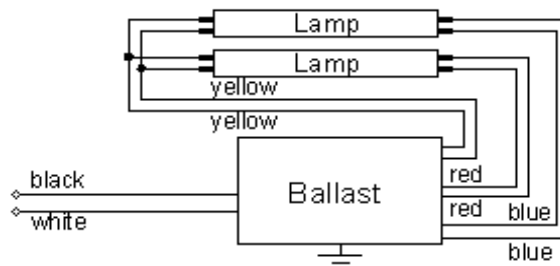



## APPLICATION and PERFORMANCE SPECIFICATION

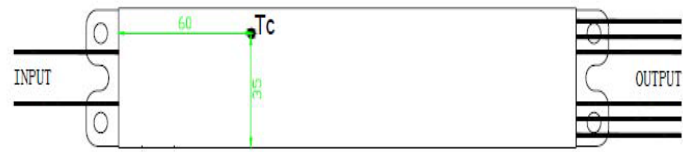

Note: For one lamp application, connect red & blue leads to one lamp.